


Kodak Lithium Battery

K28L

Effective : July 2003

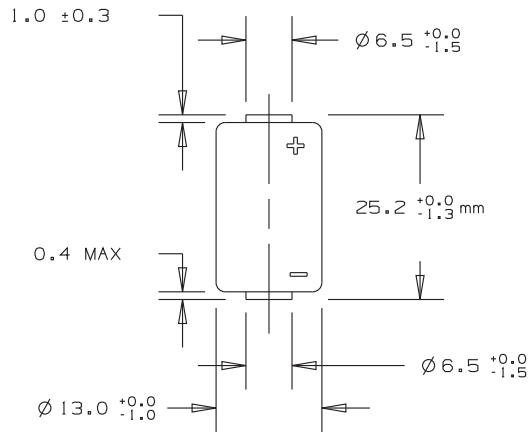


System:	Lithium/Manganese Dioxide, Li/MnO ₂
Designation:	ANSI 1406LC, IEC-2CR11108
Nominal Voltage:	6.0 Volts
Capacity:	160 mAh at 2.0 mA
Maximum Discharge:	60 mA Continuous, 80 mA Pulse
Maximum Reversal Current:	2 mA
Temperature Range:	-40°C to 65°C Operating -20°C to 45°C Storage
Average Weight:	9.1 grams
Volume:	3.28 cm ³
Terminals:	Flat Contacts
Jacket:	Metal Litho
Lithium Content:	<0.5 grams/Battery

NOTE: 1) This battery complies with ANSI C18, IEC 60086, & EEC directive 91/157 standards.


Typical Discharge Characteristics K28L

TEMP: 23°C

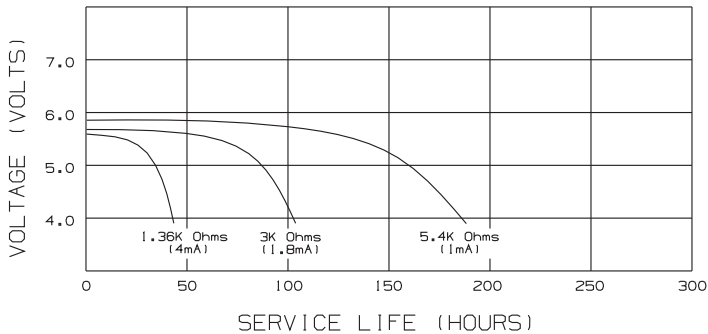


Typical Temperature Characteristics K28L

LOAD: 2K Ohms (2.7mA)

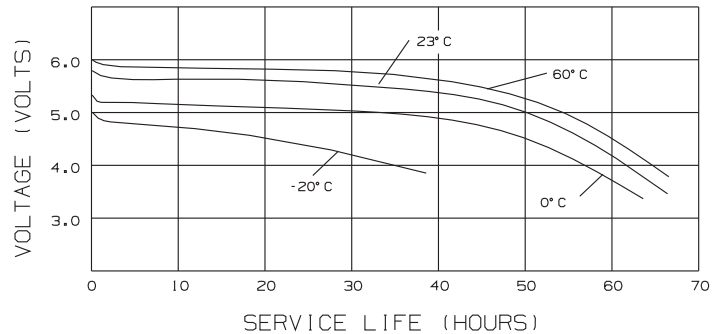


Typical Pulse Discharge Characteristics K28L

LOAD: 100 Ohms (26mA) 10 SEC ON / 20 SEC OFF
TEMP: 25°C

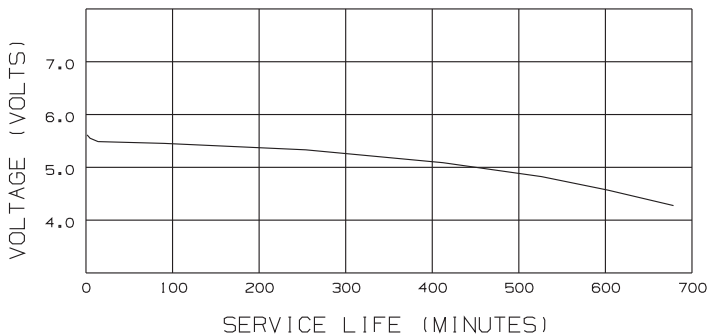

Typical Temperature Characteristics K28L

LOAD: 2M Ohms (2.9uA)

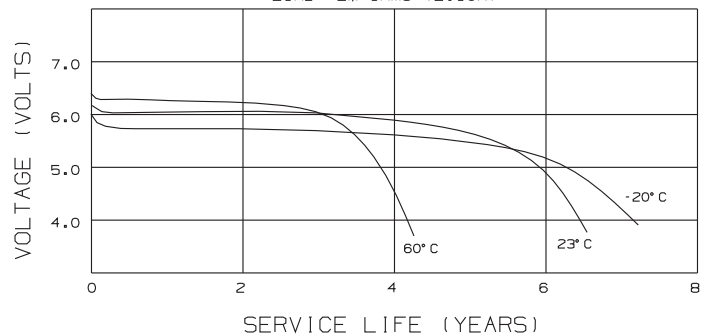

The curves and data in this publication represent product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. The company reserves the right to change and improve product characteristics at any time.

For more information, contact
EASTMAN KODAK COMPANY
343 State Street
Rochester, New York 14650-0811
1-800-242-2424
www.kodak.com/go/batteries